

MODEL CF-18 CONTINUOUS FEEDER


The model CF-18 Feeder provides an economical solution to accurately feed a variety of paper products. It depends on the accuracy of the feeder for locating the products. It can feed directly into a model T-646I conveying and taping system or customer supplied equipment. The CF-18 is typically part of a CF-18/T-646I taping system.

FEATURES

- Accommodates paper products up to 0.040" (1 mm) thick
- Economical solution for accurate feeding
- Easy changeover of product sizes
- Provides continuous top load of product to increase productivity
- Attaches to a T-646I

OPTIONS

- CF-30 also available for 30" (762 mm) wide product

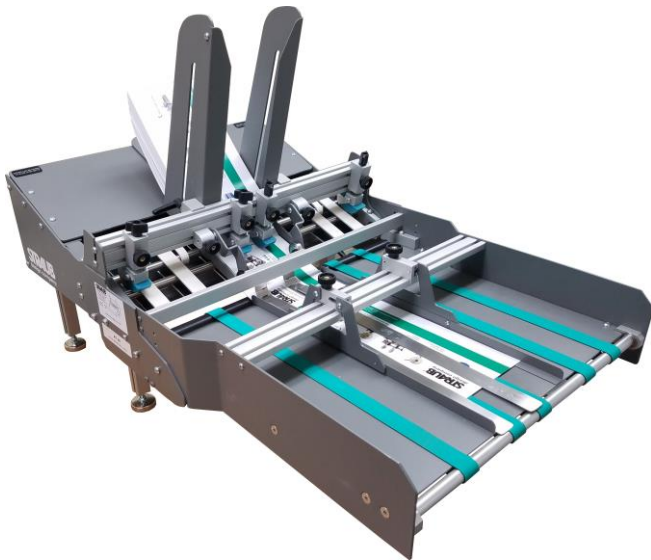

SPECIFICATIONS

- Electrical: 115 VAC, 60 Hz, 8 A
230 VAC, 50 Hz, 8 A
- Size: 23" (584 mm) wide x 27" (686 mm) high x 36" (914 mm) long
- Conveying height: 8.5" (216 mm)
- Speed: Adjustable to 400 ft. (122 m) per minute (will not run that fast with T-646 Taping System)
- Weight: 40 lbs. (18 kg)
- Product accommodation specifications are product dependent
- Product width: 3" (76 mm) to 18" (457 mm)
- Product length: 2" (50 mm) to 20" (508 mm)
- CE Marked
- The equivalent continuous A-weighted sound pressure level in the operator's position: 73 dB (A)
- Sound power emitted where the equivalent continuous A-weighted SPL exceeds 80 dB (A). Tested values did not exceed 80 dB (A): --- dB (A)

See Straub for engineered tape solutions in a variety of industries, from automotive and packaging to solar. If we don't have the tape applicator you need, we'll design, build and install a custom solution for you.