

MODEL LWPN TEAR TAPE UNWIND & APPLICATORS

The powered level unwind is designed to unwind of pressure sensitive tear strip tapes for application to overnight envelopes or corrugated products when used with the Model T-626 or T-627 applicators. The tape applicator can be mounted over a moving product or conveyor or used on custom designed taping equipment.

OPTIONS

Controls systems to start and stop the application of the tape

Tape low or tape out sensors

220v AC, 50/60 Hz

TAPE SPECIFICATIONS

Tape Roll Diameter: 15" OD x 6" high – 6" ID x 7" long core, larger units available

Level Wound Roll: 1/8" – 1/4" wide level wound roll

Optional 1/4" – 1" wide


Application Speeds: Up to 350' per minute

Note: The tape cut-off creates a serrated cut-off for the tape. The tape gripper will leave some marks on the adhesive side of the tape approximately 1/2" (13mm) from the leading end of the tape.

The powered unwind can be used with the model T-627 or T-626 applicator. The T-626 is shown at right. Both are available in either RH or LH.



LWPN

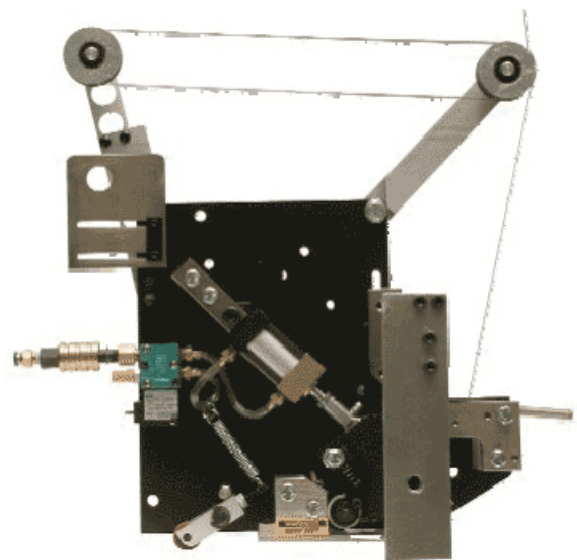

T-626

See Straub for engineered tape solutions in a variety of industries, from automotive and packaging to solar. If we don't have the tape applicator you need, we'll design, build and install a custom solution for you.